


PLASTIC BONDED MAGNETS

NdFeB 55/60 p

isotropic, injection moulded

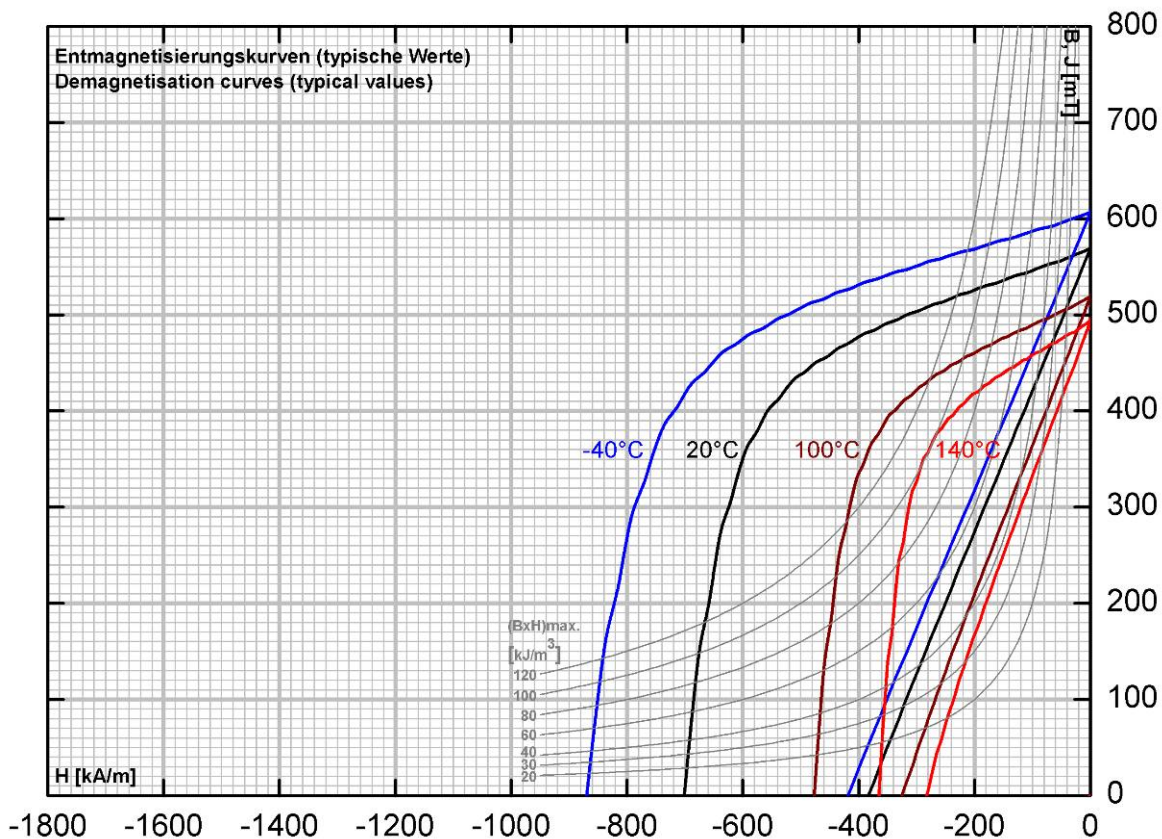

MATERIAL DATA

Magnetic values according to DIN IEC 60404-8-1

Energy product (B·H) _{max.}	typ.	kJ/m ³	57
	min.	kJ/m ³	55
Remanence B _r	typ.	mT	570
	min.	mT	560
Revers. temp. coeff. of B _r	approx.	%/K	-0.11 ¹⁾
Coercivity H _c	H _{cB} typ.	kA/m	390
	H _{cB} min.	kA/m	375
	H _{cJ} typ.	kA/m	700
	H _{cJ} min.	kA/m	600
Revers. temp. coeff. of H _{cJ}	approx.	%/K	-0.4 ¹⁾
Relative permanent permeability μ _{rec.}	approx.		1.15
Curie temperature	approx.	°C	310
Magnetising field strength	min.	kA/m	>2800

Max. operating temperature

Matrix binder PA 12	approx.	°C	120 - 140 ²⁾
Matrix binder PPS ³⁾⁴⁾	approx.	°C	120 - 160 ²⁾

Mechanical values

Density	approx.	g/cm ³	5.2
---------	---------	-------------------	-----

¹⁾ In the temperature range from 20 °C to 100 °C.

²⁾ The max. operating temperature depends on the magnet dimension and the specific application. Please contact our application engineering for more information.

³⁾ For magnets with PPS as binder, the chemical resistance to oils, grease, motor oils etc. is significantly better than for PA-bonded magnets; however this has to be checked in individual cases.

⁴⁾ On request.

All values indicated were determined on a sample (10 mm x 10 mm x 5 mm) according to IEC 60404-5.

For unfavourable geometries, especially for thin magnets, the excessively fast solidification process can cause the material data to be less than optimal.